



## **TIA-942**

Data Centre Standards Overview



# TIA-942

## Data Centre Standards Overview

For the past 20 years, cabling standards have been the cornerstone of ensuring proper design, installation, and performance of the network. The Telecommunications Industry Association (TIA) revolutionised our industry when they released the first TIA-568 Commercial Building Telecommunications Wiring Standard, which describes the design, installation, and performance requirements for telecommunications cabling systems in commercial buildings. On the whole, standards have enabled our industry to effectively advance faster and further.

Unfortunately, data centres were historically designed in the absence of established standards. This had many network administrators faced with the challenge of choosing technologies and deciphering how to properly implement them into an often-undersized space that is responsible for securely and reliably providing all the existing and future services to an enterprise.

In April 2005, the TIA responded with the TIA-942 Telecommunications Infrastructure Standards for Data Centres, the first standard to specifically address data centre infrastructure. Intended for use by data centre designers early in the building development process, TIA-942 covers the following:

- Site space and layout
- Cabling infrastructure
- Tiered reliability
- Environmental considerations

This paper describes the key elements of the TIA-942 standard, a valuable tool in designing your data centre and maximising your investment.

## Site Space and Layout

Proper space allocation for a data centre starts with ensuring that space can be easily reallocated to changing environments and growth. Designers must strike a balance between acceptable initial deployment costs and anticipated space required in the future.

The data centre should be designed with plenty of flexible "white space," empty space that can accommodate future racks or cabinets. The space surrounding the data centre must also be considered for future growth and planned for easy annexation.

A large part of TIA-942 deals with facility specifications. The standard recommends specific functional areas, which helps to define equipment placement based on the standard hierarchical star topology design for regular commercial spaces. Designing a data centre with these functional areas anticipates growth and helps create an environment where applications and servers can be added and upgraded with minimal downtime and disruption. According to TIA-942, a data centre should include the following key functional areas:

### One or More Entrance Rooms

This is the location for access provider equipment and demarcation points, as well as the interface with campus cabling systems. The Entrance Room may be located either inside or outside the computer room, the portion of the data centre that houses data processing equipment. The standard recommends locating the entrance room outside of the computer room for better security. When located within the computer room, the Entrance Room should be consolidated with the MDA. It is possible that provider's cabling distances may require multiple Entrance Rooms for larger data centres.

### Main Distribution Area (MDA)

Similar to an MDF, the MDA is a centrally located area that houses the main cross-connect as well as core routers and switches for LAN and SAN infrastructures. The MDA may include a horizontal cross-connect (HC) for a nearby equipment distribution area. The standard requires at least one MDA and specifies installing separate racks for fibre, UTP, and coaxial cable in this location.

### One or More Horizontal Distribution Areas (HDA)

Similar to a TR, the HDA serves as the distribution point for horizontal cabling and houses cross-connects and active equipment for distributing cable to the equipment distribution area. Like the MDA, the standard specifies installing separate racks for fibre, UTP, and coaxial cable in this location. It also recommends locating switches and patch panels to minimise patch cord lengths and facilitate cable management. The HDA is limited to 2000 connections, and the number of HDAs is dependent on the amount of cabling and overall size of the data centre.

### Equipment Distribution Area (EDA)

Horizontal cables are typically terminated with patch panels in the EDA, the location of equipment cabinets and racks. The standard specifies installing racks and cabinets in an alternating pattern to create "hot" and "cold" aisles, a configuration that effectively dissipates heat from electronics (see Environmental Considerations for a discussion on cooling and hot aisle/cold aisle configuration).

### Zone Distribution Area (ZDA)

The ZDA is an optional interconnection point in the horizontal cabling between the HDA and EDA. The ZDA can act as a consolidation point for reconfiguration flexibility or for housing freestanding equipment like mainframes and servers that cannot accept patch panels. Only one ZDA is allowed within a horizontal cabling run with a maximum of 288 connections. The ZDA cannot contain any cross-connects or active equipment.

### Backbone and Horizontal Cabling

Within the data centre, backbone cabling provides connections between MDA, HDAs, and Entrance Rooms while horizontal cabling provides connections between HDAs, ZDA, and EDA. Optional backbone cabling can be installed between HDAs for redundancy. Each functional area must be located in such a way to prevent exceeding maximum cable lengths for both backbone and horizontal cabling.



cabinets on raised floors in a way that enables easy lifting of tiles. Locating switches and patch panels to reduce the need for patching between cabinets and racks is also recommended.

TIA-942 extends the TIA-606-A Administration Standard to data centres, which specifies a labeling scheme for all racks, cabinets, patch panels, patch cords, and cables.

## Tiered Reliability

To provide a means for determining specific data centre needs, the TIA-942 standard includes an informative annex with data centre availability tiers. These tiers are based on information from the Uptime Institute, a consortium dedicated to providing its members with best practices and benchmark comparisons for improving the design and management of data centres.

For each of the four tiers, the annex describes detailed architectural, security, electrical, mechanical, and telecommunications recommendations, and the higher the tier, the higher the availability. Tier descriptions include information like raised floor heights, watts per square foot, and points of failure. "Need," or "N," indicates the level of redundant components for each tier with N representing only the necessary system need. Construction cost per square foot is also provided and varies greatly from tier to tier; with Tier 3 costs double that of Tier 1.

Breaking data centre reliability into these tiers provides designers with a method for qualifying certain aspects of the data centre and objectively comparing one data centre to another.

### Tier 1 – Basic: 99.671% Availability

- Susceptible to disruptions from both planned and unplanned activity
- Single path for power and cooling distribution, no redundant components (N)
- May or may not have a raised floor, UPS, or generator
- Takes 3 months to implement
- Annual downtime of 28.8 hours
- Must be shut down completely for perform preventive maintenance

### Tier 2 – Redundant Components: 99.741% Availability

- Less susceptible to disruption from both planned and

unplanned activity

- Single path for power and cooling disruption, includes redundant components (N+1)
- Includes raised floor, UPS, and generator
- Takes 3 to 6 months to implement
- Annual downtime of 22.0 hours
- Maintenance of power path and other parts of the infrastructure require a processing shutdown

### Tier 3 – Concurrently Maintainable: 99.982% Availability

- Enables planned activity without disrupting computer hardware operation, but unplanned events will still cause disruption
- Multiple power and cooling distribution paths but with only one path active, includes redundant components (N+1)
- Takes 15 to 20 months to implement
- Annual downtime of 1.6 hours
- Includes raised floor and sufficient capacity and distribution to carry load on one path while performing maintenance on the other.

### Tier 4 – Fault Tolerant: 99.995% Availability

- Planned activity does not disrupt critical load and data centre can sustain at least one worst-case unplanned event with no critical load impact
- Multiple active power and cooling distribution paths, includes redundant components (2 (N+1), i.e. 2 UPS each with N+1 redundancy)
- Takes 15 to 20 months to implement
- Annual downtime of 0.4 hours

## Environmental Considerations

Several environmental considerations exist within the TIA-942 data centre standard that are similar to the equipment room requirements set forth in previous TIA standards. These considerations include, but are not limited to, fire suppression, humidity levels, operating temperatures, architectural, electrical (power) and mechanical system specifications. Some of the requirements are dependent on the desired reliability tier described above.

## Power

Determining power requirements is based on the desired reliability tier and may include two or more power feeds from the utility, UPS, multiple circuits to systems and equipment, and on-site generators. Determining power requirements requires careful upfront planning.

Estimating power needs involves determining the power required for all existing devices and for devices anticipated in the future. Power requirements must also be estimated for all support equipment such as UPS, generators, conditioning electronics, HVAC, lighting, etc. The power estimation must be made to accommodate required redundancy and future growth.

## Cooling

Most significantly, the standard incorporates specifications for encouraging airflow and reducing the amount of heat generated by concentrated equipment. The standard recommends the use of adequate cooling equipment as well as a raised-floor system for more flexible cooling. Additionally, the standard states that cabinets and racks should be arranged in an alternating pattern to create "hot" and "cold" aisles. In the cold aisle, equipment racks are arranged face to face. In the hot aisle, they are arranged back to back. Perforated tiles in the raised floor of the cold aisles allow cold air to be drawn into the face of the equipment. This cold air washes over the equipment and is expelled out the back into the hot aisle. In the hot aisle, there are no perforated tiles, which keeps the hot air from mingling with the cold (see Figure 2).

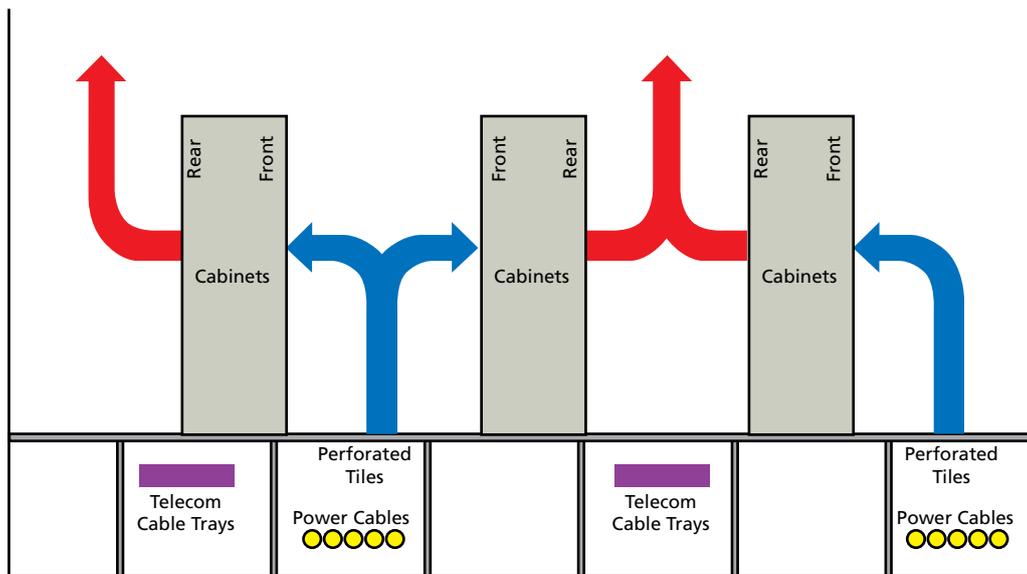


Figure 2. Hot Aisle/Cold Aisle Cooling

Because not every active piece of equipment exhausts heat out the back, other considerations for cooling include the following:

- Increase airflow by blocking unnecessary air escapes and/or increasing the height of the raised floor
- Spread equipment out over unused portions of the raised floor, space permitting
- Use open racks instead of cabinets when security is not a concern, or use cabinets with mesh fronts and backs
- Use perforated tiles with larger openings

## Conclusion

When it comes to building a reliable data centre and maximising your investment, the design must be considered early in the building development process and include coordinated efforts that cut across several areas of expertise including telecommunications, power, architectural, and HVAC.

Each of the components of the data centre and its supporting systems must be planned, designed, and implemented to work together to ensure reliable access of data centre resources while supporting future requirements. Neglecting any aspect of the design can render the data centre vulnerable to cost failures, early obsolescence, and intolerable availability. There is no substitute for careful planning and following the guidelines set forth in the TIA-942 Telecommunications Infrastructure Standards for Data Centres.

To obtain a copy of the TIA-942 standard or to receive more information, visit the following websites:

For Information on

**TIA-942 Standard**

Visit The TIA at:

[www.tiaonline.org/standards](http://www.tiaonline.org/standards)

For information on

**General data centre reliability information including power and cooling**

Visit The Uptime Institute at:

[www.uptime.com](http://www.uptime.com)

For Information on

**Components and Best Practices**

Visit ADC KRONE at:

[www.adckrone.com](http://www.adckrone.com)

WHITE PAPER



**Web Site:** [www.adckrone.com/en](http://www.adckrone.com/en)

**EMEA Office:** ADC GmbH, Beeskowdamm, 3-11, 14167 Berlin, Germany • Phone: +49 30 8453 1818 Fax: +49 30 8453 1703. For a listing of all ADC KRONE's global sales office locations, please refer to our web site.

**UK Office:** ADC Communications (UK) Ltd., Runnings Road, Kingsditch Trading Estate, Cheltenham, Gloucestershire GL51 9NQ, United Kingdom • Phone: +44 (0) 1242 264 400 Fax: +44 (0) 1242 264 488 [contactuk@adckrone.com](mailto:contactuk@adckrone.com)

Specifications published here are current as of the date of publication of this document. Because we are continuously improving our products, ADC KRONE reserves the right to change specifications without prior notice. At any time, you may verify product specifications by contacting ADC GmbH headquarters in Berlin. ADC Telecommunications, Inc. views its patent portfolio as an important corporate asset and vigorously enforces its patents.

**Part Number 102264BE Oct 08 Revision © 2008, 2007 ADC Telecommunications Inc. All Rights Reserved**